



JBC
The Soldering Co.



Station Guide

Believe in innovation, enjoy the power

A global organization at your service

JBC is a global company with a distributor network spanning 5 continents that guarantees a solid commercial organization with quick and efficient service.

The power of experience

More than 90 years of experience have placed JBC at the technological forefront of tools for soldering and rework operations in electronics. Innovation, efficiency and reliability are the key features of a wide range of products which have been designed to satisfy the most demanding requirements of professionals.

High technology, superior quality

Product perfection is one of the main objectives of JBC's improvement and development program. The R&D department has created the most innovative soldering technologies, which JBC is proud to present in this catalog.

CE
ESD safe

All JBC products comply with CE standards and ESD recommendations.




JBC Technology

Most Efficient Soldering System

JBC Stations work with JBC Most Efficient Soldering System, which **recovers tip temperature extremely quickly**. This increases work efficiency and allows the user to work with lower temperatures.

Efficient Temperature Control
Comparative process of 3 solder joints

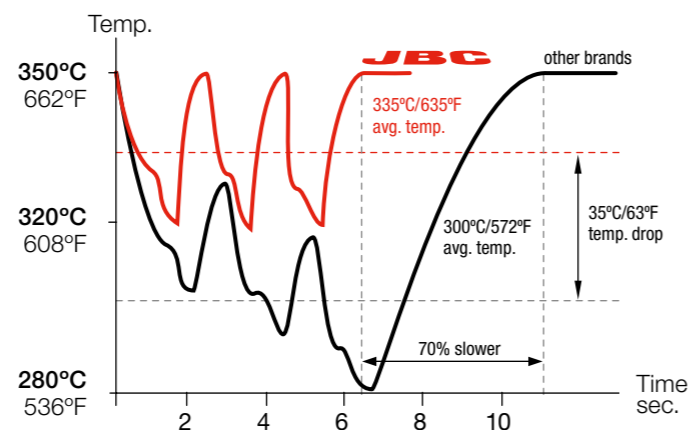


Tips with JBC Technology only drop 30°C (54°F) where others drop as much as 70°C (126°F).

Enhanced Temperature Efficiency → Increased Productivity + Better Quality

Productivity

Short tip-to-sensor distance ensures extremely quick temperature recovery and an **accurate control**.

Heating System Principles
350°C/662°F in 2 seconds

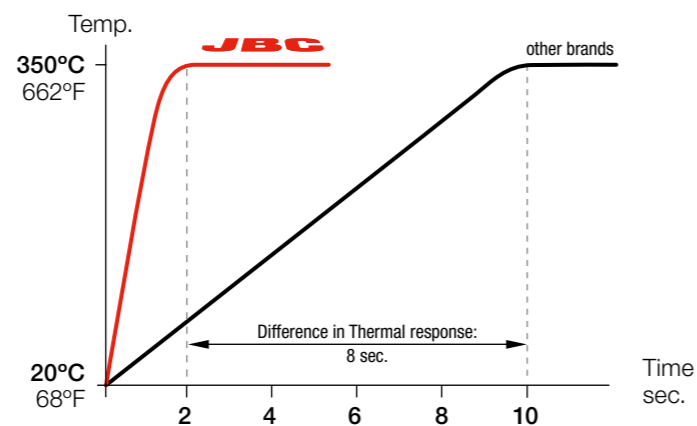

This graph compares JBC C210 Cartridge Range to the equivalent cartridges of the best competitor.

Intelligent Heat Management

Thanks to automatic detection of the tool in the stand, JBC Soldering & Rework Stations allow the tools to enter **Sleep & Hibernation Modes** when not being used. As a result, tip life lasts up to 5 times longer.

Sleep Mode



Sleep Mode **automatically lowers tip temperature** below the solder melting point when the tool rests in the stand. **It prevents the dissolution of the iron tip coating into molten solder.**

Hibernation Mode

After a configurable period of tool inactivity in the stand, the tool enters Hibernation Mode. **It cuts off the power supply**, making the tip reach room temperature, thus **preventing oxidation and saving energy**.


Longer Tip life

Tip life increases exponentially by **using lower temperatures** as shown. Using Sleep Mode, the temperature is further reduced, which **multiplies tip life by 5**.

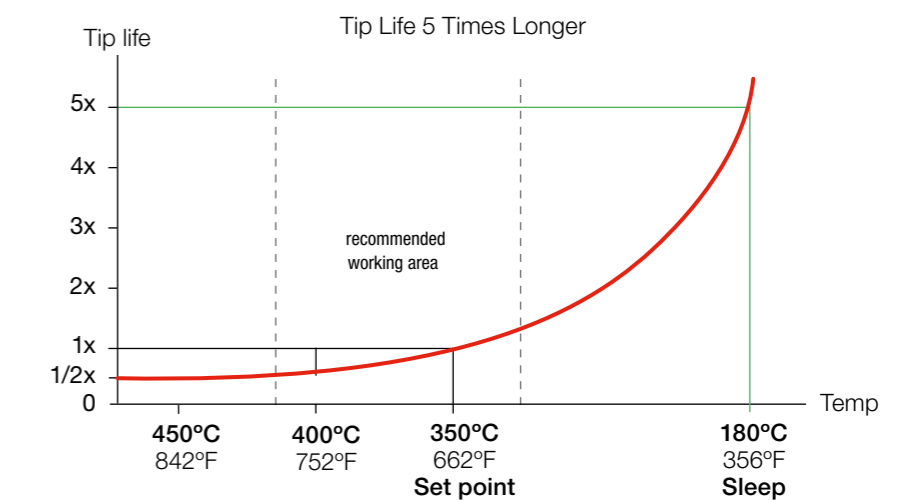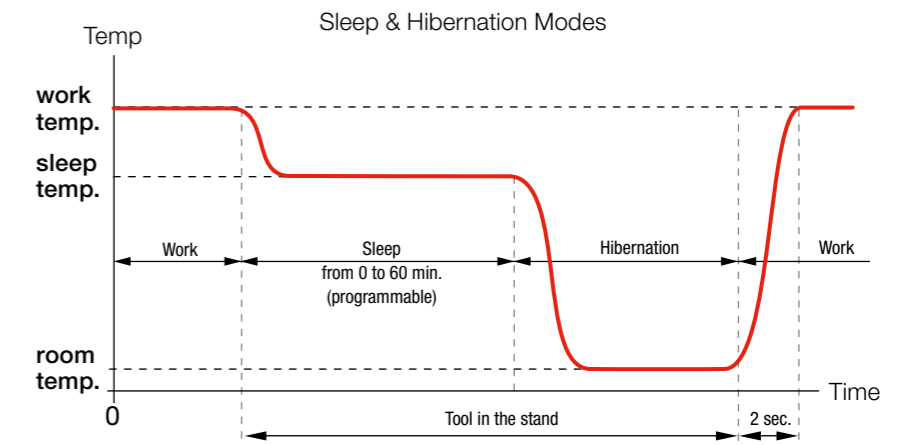

Cartridges with long life & extended tip life

The essential part of the soldering iron is the tip. Therefore, JBC has **over 500 cartridge models of different shapes and sizes** to choose from, depending on each application. JBC has developed the most advanced technology based on the following principles:

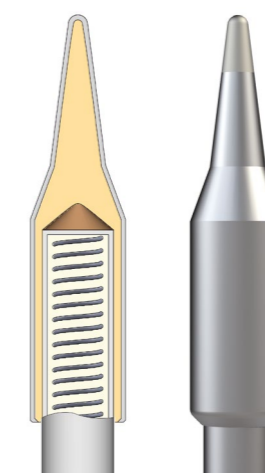

- **Excellent Heat Transfer**
The compact element reduces thermal barriers.
- **Instantaneous Heating**
A fully-integrated thermal sensor in the heater ensures quick temperature recovery.
- **Great Durability**
The intelligent algorithm control program extends tip life.

B-IRON Battery-Powered System

The easiest way of soldering

Control and configure the tool parameters **from any device**

Elevate your possibilities with our new solutions

Improve & optimize your soldering quality

By using B-IRON App, you can configure and control the system.

Alternatively, **use your own device.**

You can download the APP from:



Cartridge Exchanger & Holder

Quick Cartridge Exchanger System avoids damage of the tips and allows you to have the **cartridges ready for exchange.**



Battery-Powered System

Charging your B-IRON is effortless thanks to its **charger integrated in the stand**, which fully charges the tool while resting in Hibernation Mode, preventing tip oxidation.

Safety Cap

The tool has a **power safe mode that is activated by the use of the cap.** If B-IRON remains idle for more than an hour, it shuts off automatically and can only be turned on again by placing it on its charging tool holder.

Tools are designed to perfectly lie in the operator's hand, making the soldering process even **more comfortable.**

New ways to explore and expand your possibilities

Revolutionize your soldering experience with an ergonomic iron designed to provide unique **freedom in usage and versatile functionality** for an optimized performance.



Battery-Powered Stations



B-IRON NANO
Nano Soldering
High-Precision Soldering in hard-to-reach areas.



B-IRON TWEEZERS
Rework
Highest precision when reworking SMDs.



B-IRON 100
Light Soldering
Designed for R&D and individual jobs.



B-IRON 500
Soldering
For electronic production and intensive jobs.



B-IRON DUAL NANO
Nano Soldering
Unparalleled precision on two workbenches simultaneously.



B-IRON REWORK
Rework
Rework SMDs without stopping.



B-IRON DUAL 500
Dual Soldering
Allows continuous work in mass production.

Compact Stations

A complete Soldering System

Each station meant for a specific purpose

Work position
JBC Stations are designed to suit the user's work position. **Tool Holder** and **Cable Collector** are easily adjustable.

Intelligent Heat Management
The stations incorporate **Sleep & Hibernation Modes**, which lower tip temperature when the tool is placed in the tool holder. As a result, **JBC tips last up to 5 times longer than tips of other brands.**

Communication Station-PC
The incorporation of a USB Connector on all stations and control units allows you to **manage your job remotely from a PC.** The most innovative technology to take your work beyond the station.

Tip Cleaning System
Compact Stations feature a tip cleaner with **antisplash membrane** to prevent splashing of solder particles and maintain the work area clean. The most complete **Tip Cleaning System** allows you to choose from three safe methods according to your needs: **metallic wool, sponge or metal brush.**

Intuitive menu and interface
Fast and easy station configuration. **User-Friendly Menu** allows you to personalize over **20 parameters** to help manage the soldering process. Set temperature limits, check usage counters, lock the station with a PIN or program Sleep & Hibernation Modes.

Quick Cartridge Exchanger and Holder
Save time and increase productivity by using **Quick Cartridge Exchanger**, which facilitates fast and safe use of different cartridge geometries. **Cartridge Holder** allows storing up to four cartridges.



CDN
High-Precision Soldering
Designed for **highest-precision jobs** in any micro-soldering application, offering **maximum control working under the microscope.**



CDS
Precision Soldering
Ideal when working on populated PCBs or under a magnifying glass.



CA
Manual-Feed Soldering
Designed for those applications requiring a **free hand.** Ideal for soldering cables, connectors, etc.



CP
Precision Rework
Ideal for soldering and **reworking SMT chip components**, small/medium SOP and dual in-line components.



CS
Desoldering
Ideal for **desoldering small THT components and SMD pad cleaning.**



CDEB
Soldering-Assistant
Improve your soldering quality while improving your skills.

Modular System

Build your solution

Stackable modules
save work space

Fully-compatible tools
with all control units

Easy-to-use menu helps
work more efficiently



Station Customization
Personalize the station parameters according to your application/needs.



Partial Counters
Register total and partial time for each port, such as work and Sleep & Hibernation Modes in hours.



Peripherals
Connect station ports to pedals and modules, such as desoldering pump, nitrogen flow regulator, etc.



Tool Presets
Set parameters for each tool to automatically apply them.



Graphics
In real time, visualize tip temperature and power delivered to the solder joint during the soldering process.



Communication Station-PC
Manage your stations remotely via PC, export graphics and update the software.



Robot
Automate the soldering process and manage the station via robot.



TFT screen

See % power for each port

Display different ports in use

USB-A
Software updating & exporting graphics

Tool in use

Consult the comprehensive **help** for each parameter

Modular System Map



Control Units



DI
1 Tool
DI Control Unit is designed for production and rework applications with low to medium thermal requirements.



DDE
2 Tools
DDE Control Unit has 2 ports with an output peak power of 150 W per port, successfully carrying out the most demanding jobs.



DME
4 Tools
DME Control Unit operates with 4 JBC Tools simultaneously. DME provides you with extra applications: USB microscope, file storage, unit converter, etc.

Multi-tool Stations

All-purpose solutions based on JBC Modular System

Ensure your **tools are always ready to work**

Up to **150 W per tool**

Optimize work with high performance

Configure tool settings for each port

Rework process with DDE 2-Tool Control Unit



AM120
T210



DT530
T245



DR560
T245

DDPE
Precision Rework
Fast and precise rework for SMD components and small outline ICs.

DDSD
Rework with DT530
Ideal for SMDs, high-power tasks, desoldering through-hole components and removing excess solder.

DDSE
Rework with DR560
For both SMD and high-power applications and desoldering through-hole components.

Handle multiple tasks with DME 4-Tool Control Unit



DT530
T245



DR560
T245

DMSD
Rework with DT530
Versatile for SMDs and high-power tasks, ideal for desoldering through-hole components.

DMSE
Rework with DR560
A solution for both SMDs and high-power applications, as well as for desoldering.



JTT & T260

DT530 & T245



JTT & T260

DT530 & T245

RMSD
Rework System with DT530
The fastest but also the safest option for soldering and rework, including the use of hot air.

RMSE
Rework System with DR560
It provides the fastest and safest solution for soldering and rework, including hot air applications.



AM120 & T210

DT530 & T245

DMPSD
Complete Rework with DT530
Perfect for precise soldering, SMD rework and handling high-power tasks, ensuring efficient desoldering of through-hole components.



AM120 & T210

DR560 & T245

DMPSE
Complete Rework with DR560
Precise soldering, SMD rework and high-power tasks, ensuring efficient through-hole desoldering.

Nano Stations

Designed for offering maximum control working under the magnifying glass

The best solution for soldering and desoldering components such as chips **01005, 0201, 0402**, etc.


Nano Stations work with **JBC Most Efficient Soldering System**, which improves the soldering quality

NANE

2-Tool Soldering

The best solution for **soldering SMDs** requiring the highest precision.

It has a peak power of 14 W per tool and more than 30 different cartridge shapes.

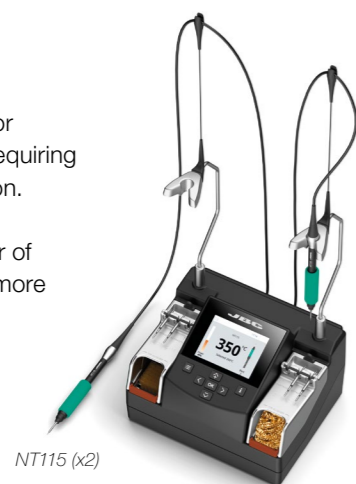

NT115 (x2)

NASE

2-Tool Rework

The best solution for **rework SMDs** requiring the highest precision.

It has a peak power of 14 W per tool and more than 30 different cartridge shapes.



AN115 & NT115

High-Precision Hot Air Station

Experience the versatility of JNA thanks to its capacity to rework a wide range of components

Rework SMDs on areas with minimal separation **without affecting nearby components**

Rework a wide range of components using the new bent hot air cartridges

JNA

High-Precision

The perfect combination of **NH Handle** and **Hot Air Cartridges** allows you to direct the heat onto the selected component. Thanks to its design and ergonomics, it enables you to work comfortably under a magnifying glass.



NH

Hot Air Stations

The highest-quality contactless desoldering

Our range of tools allows you to **repair all types of SMDs** quickly and safely

JBC Hot Air Stations have the capability of **controlling precise temperature and airflow**

TESE

Precision

Precision hot air station capable of **reworking small and medium SMDs**. It has a peak power of 300 W and with 2 to 17 SLPM air flow.

An external thermocouple connection for high-precise close-loop control of the component/PCB during the rework process.



TET

JTSE

Power

A high-powered hot air station capable of **reworking all types of SMDs**. It has a peak power of 700 W and with 5 to 50 SLPM air flow.

An external thermocouple connection for high-precise close-loop control of the component/PCB during the rework process.



JTT

SRS

SMD Rework System

SRS SMD Rework System **provides full control over SMD rework processes**.

RWS Rework Arm supports JTT Heater Hose Set, allowing **handsfree operation**.

PHSEK Preheater Set includes PHSE Preheater and PHSS PCB Support.



JTT

Automatic-Feed Stations

Consistently dispense programmed amounts, ensuring uniform soldering joints

Makes soldering components easy, giving the operator **one free hand for more stability** in the soldering process

Work without interruptions makes the process more efficient

ALE
Automatic-Feed Soldering
The ideal solution for the soldering process requiring high productivity.

It has a peak power of 150 W.
It features solder wire perforation, allowing better flux flow and outgassing.



ALE250

SF
Automatic Solder-Wire Feeder
Allows feeding solder wire automatically from any position.

It features solder wire perforation, allowing better flux flow and outgassing.



SF280

Heavy Duty Stations

Industrial equipment ready to work intensively

250 Watts peak power for **high-thermal demands** and prolonged soldering applications

Used in production of solar panels, multi-layered circuits and **components of large dissipation surfaces**

HDE
Soldering
The **most powerful soldering unit** of the JBC Range.
It has a peak power of 250 W.



T470

HDEK
REWORK
Designed to **reduce the soldering time in applications that require a large amount of heat transfer.**
It has a peak power of 250 W.



HT470

Preheaters

Forget about thermal shock

Matchless reliability in **temperature accuracy and control** of the PCBA

3 Work Modes safer and easier with up to 8 thermocouples

Independent work zones to be turned on/off



PHNEK
For PCBs up to 11 x 7 cm / 4 x 3"
The best solution to **rework small PCBAs**, such as the ones commonly used in smartphones.



PHSMK
For PCBs up to 13 x 13 cm / 5 x 5" with PSS
A solution to **rework small / medium PCBAs**, such as the ones commonly used in electronics industries. It features PSS for fast, easy and precise PCB changes.




PHSEK
For PCBs up to 13 x 13 cm / 5 x 5"
Complete solution to **rework small / medium PCBAs**, such as the ones commonly used in electronics industries.



PHBEK
For PCBs up to 36 x 28 cm / 14 x 11"
The best solution to **rework medium / large PCBAs**, such as the ones commonly used in laptops or PCB panels.

PHXLEK
For PCBs up to 51 x 61 cm / 20 x 24"
This is a complete system for preheating **big-sized PCBAs** such as communications boards, airplanes, etc. and ideal for repetitive soldering jobs.

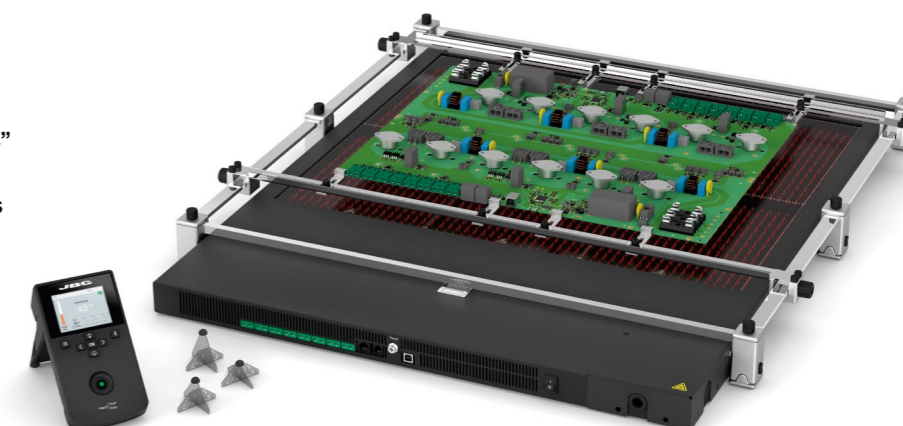

Wire Stripper Stations

High-temperature wire stripping

Wire insulations made of **thermostable materials such as Teflon*, Kapton*, silicone rubber, etc.** from 40 to 14 AWG (0.08 to 1.63 mm / 0.003 to 0.064 in) with temperatures of up to 800°C / 1470°F

WSS

High-Temperature Precision

Its improved tweezer design makes it a small, ergonomic, handy and very safe tool, preventing burns even when reaching very high temperatures.



WS140

Tip Cleaning Systems

Invest your time in soldering, not cleaning

Clean the tip in less than a second. With automatic cleaners you **save time and optimize production**

A clean tip is always easier to tin, resulting in higher **quality solder joints**



CLMUP
Automatic with Fiber Brushes (non-metal)
Perform a thorough and **gentle tip cleaning**. Regular usage recommended to improve tip life.



CLMS
Automatic Junior
Improve thermal transfer of the tip in only 1 second. It fits in any work area thanks to its **reduced size and is very easy to maintain**.



CL
Manual
A **complete cleaning system** with splashguard and antispash membrane to keep the work area clean and free of solder particles.

Fume Extractors

FAE1 is the most effective solution to avoid exposure to solder fumes

FAE1

With FAE1100 for 1 Workbench
FAE1 only operates when soldering and features a unique vacuum system integrated into the stand.

Each arm offers 80 m³/h aspiration, optimizing fume extraction for two workbenches. It surpasses industry standards, ensuring higher air quality and compliance.



Accessories

Work faster, easier and safer with our variety of complements for soldering & desoldering



DPM

Manual Paste Dispenser

Precise dosage for solder paste, adhesive, solder flux, etc. – ideal for SMT rework.



ESD PRODUCT LINE

ESD Table Mats

Protect the operator and equipment from static electricity discharges by draining the static electricity from objects placed on its surface.



PSS

Multiaxis Rotative PCB Support

Ensures fast and precise PCB handling in any position. Turn your PCB upside-down (180°) in one movement. Designed to simplify your work, with or without preheater.



TWEEZERS

for precision in electronics

Thanks to the tip design, these are well suited, especially for SMT.



CUTTERS & PLIERS

for electronics

Suitable for a wide range of electronics applications. Full line designed according to ESD safety regulations.

Cartridge Map

Over **500** Cartridges & Customized models

See the **full range** on our website



C115

 C115126	 C115101	 C115103	 C115106	 C115107	 C115124	 C115118	 C115105	 C115110	 C115116	 C115117	 C115108	 C115125	 C115113	 C115114
Stainless steel tip C115115					Spoon C115128		High-Thermal Performance C115213 C115214 C115221 C115222 C115223							

C245

 C245731	 C245773	 C245742	 C245774	 C245906	 C245406	 C245768	 C245944	 C245907	 C245407	 C245759	 C245770	 C245741	 C245729	 C245061	 C245911
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

 C245775	 C245755	 C245756	 C245908	 C245708	 C245967	 C245069	 C245966	 C245030	 C245032	 C245036	 C245930	 C245001	 C245937	 C245957	 C245903	 C245403	 C245943	 C245933	 C245107
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

 C245747	 C245710	 C245905	 C245405	 C245945	 C245795	 C245784	 C245793	 C245912	 C245056	 C245951	 C245766	 C245301
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

 C245732	 C245761	 C245034	 C245029	 C245126	 C245786	 C245929	 C245935	 C245904	 C245259	 C245260	 C245627	 C245628
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

 C245053	 C245052	 C245054	 C245119	 C245772	 C245790	 C245785	 C245763	 C245760	 C245754	 C245751	 C245667	 C245764	 C2455P01
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	--------------

C245E Cartridges have a reinforced protection on the tip that provides a longer life with a small reduction of thermal efficiency.

 C245159E	 C245158E	 C245160E	 C245155E	 C245735E	 C245161E	 C245070E	 C245968E	 C245156E	 C245354E	 C245157E
--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------

C120 Chip Components

 C120002	 C120902	 C120006	 C120004	 C120012	 C120011	 C120001
-------------	-------------	-------------	-------------	-------------	-------------	-------------

C210

 C210020	 C210009	 C210016	 C210001	 C210013	 C210003	 C210005	 C210002	 C210010	 C210014	 C210004	 C210006	 C210027	 C210031	 C210028	 C210029	 C210030	 C210019	 C210023	 C210021
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

C250

 C250420	 C250401	 C250402	 C250403	 C250409	 C250410	 C250404	 C250405	 C250406	 C250412	 C250418	 C250407	 C250408	 C250411	 C250413	 C250414	 C250415
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

C420 Chip Components, Blade type, QFP & PLCC, Dual in-line

 C420271	 C420272	 C420283	 C420288	 C420280	 C420279	 C420273	 C420274	 C420275	 C420276	 C420277	 C420278	 C420285	 C420286	 C420287
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

C470

 C470013	 C470036	 C470014	 C470040	 C470035	 C470017	 C470009	 C470002	 C470015	 C470004	 C470016	 C470008	 C470039	 C470006	 C470007	 C470019	 C470003	 C470056
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

 C470064	 C470059	 C470023	 C470063	 C470061	 C470051	 C470027	 C470021	 C470022	 C470044	 C470057	 C470005
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

Through-hole and cable soldering

 C470048	 C470049	 C470033	 C470030	 C470037	 C470041	 C470031	 C470047	 C470010	 C470042	 C470046	 C470050	 C4700P01	 C4700P42
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	--------------	--------------

C360 Pad Cleaners Tips

 C360001	 C360002	 C360003	 C360004	 C360007	 C360006	 C360011	 C360012	 C360013	 C360014
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

D530 **C560**

 D530017	 C560017	 D530014	 C560014	 D530009	 C560009	 D530006	 C560006	 D530003	 C560003	 D530000	 C560000
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

CO00000 High Thermal Efficiency Cartridges: These are characterised by their optimised tip geometries which achieve improved thermal efficiencies of up to 40%.

CO00000* These cartridges are 20mm longer than normal cartridges for easier access to difficult-to-reach joints.

I-TRONIK S.R.L. Unipersonale
Viale dell'Artigianato, 20 - 35010 - Peraga di Vigonza (PD)
Tel. +39.049.895.2300 - Fax +39.049.893.4822 - P.IVA 01443020282
commerciale@itronik.it - www.itronik.it

ISO
9001

ISO
14001

ISO
45001

ESD safe



www.jbctools.com



0035149/0325